



# Standard Series


## Construction Wheelbarrow Standard 85

- sturdy, 1-part and powder-coated steel tube frame with tipping- & tray support
- galvanised 85 Litres tray made of steel sheet - Payload 150 kg
- powder-coated steel rim with friction bearing & pneumatic tyre
- suitable for building materials such as stones, tiles, etc.
- available in 4 colours



## Standard 85

- sturdy, 1-part and powder-coated steel tube frame with tipping- & tray support
- galvanised 85 Litres tray made of steel sheet with straight front
- Payload 150 kg
- robust, powder-coated steel rim with friction bearing & pneumatic tyre
- comfortable & non-slip plastic handles
- suitable for building materials such as stones, tiles, gravel, and much more
- available in grey, green, red and yellow

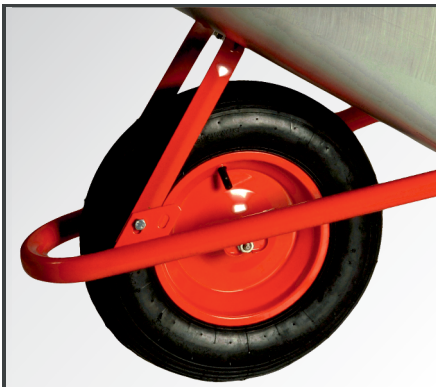

Tipping- and tray support as well as powder-coated steel rim with friction bearing.



Galvanised tray with straight front made of steel sheet.



Sturdy, 1-part & powder-coated steel tube frame with non-slip plastic handles.

Construction Wheelbarrow		Standard 85		Logistic Data	
Frame	Steel tube 1-part (powder-coated)	[REF]		[PU 20]	240 kg + EP
Frame Ø	32 mm	[PU 30]		[PU 30]	360 kg + EP
Frame thickness	1.6 mm	LX11000080		3 850215 1000084	
Tray	Steel sheet (galvanised)	LX11000090		3 850215 1000091	
Tray thickness	0.7 mm	LX11000480		3 850215 1000480	
Load capacity (heaped filling)	85 litres	LX11000690		3 850215 1000695	
Payload max.	150 kg				
Tipping- and tray support	✓				
Wheel (steel rim with friction bearing & pneumatic tyre)	4.0 x 8 Inch				
Weight approx. (N.W.)	12 kg				
Order-no.					
grey	LX11000080				
green	LX11000090				
red	LX11000480				
yellow	LX11000690				