



ATIKA®

Concrete mixer **Profi 145 S**

The quality mixer with handwheel - operation and foot-brake.

Equipped with a powerful motor for excellent mixing results.

A professional mixer for each construction site.



CE

Concrete mixer **Profi 145 S**


The all-rounder - a professional mixer that fits every construction site.

- With powerful motors: 3-phase motor of 750 Watt and A.C. single-phase motor of 700 Watt are available for selection;
- motors with thermal overload protection and restart protection in case of power failure;
- durable and resilient due to the torsion-resistant frame and robust drum bearings;
- specially designed agitator for optimum mixing quality;
- large, flanged agitator drum that is easy to fill;
- well equipped for long-term use, because
 - the adjustment-free drive belt,
 - the segmented gear rim and
 - the quality ball bearings on the drum and drive shaft
 guarantee smooth and continuous power transmission;
- + with additional foot-brake for even safer and more convenient operation;
- + the stable chassis also makes the mixer easy to manoeuvre on construction sites.

safer operation due to the handwheel and foot-brake



powerful agitator

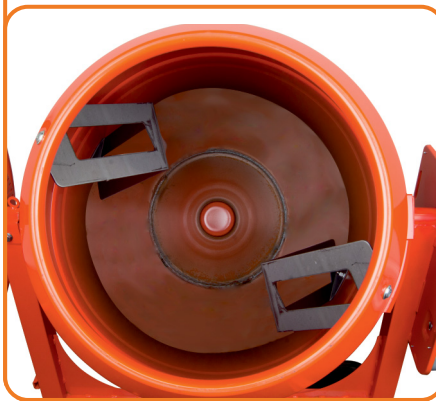

strong drum bearing









Concrete mixer

Profi 145 S

| | | |
|--|------------------------------|------------------------|
| Order-no | 322500 | 322501 |
| Electric motor | 230 V~ 50 Hz | 400 V3~ 50 Hz |
| Motor type | A.C. single-phase | 3-phase |
| Input power P _i (S1) | 700 W | 750 W |
| Rotation speed n ₀ | 2850 min ⁻¹ | 2750 min ⁻¹ |
| Drum capacity | 145 l (± 7%) | |
| Nominal capacity | 115 l (± 7%) | |
| Protection class | II | |
| Protection degree | IP 45 | |
| Guaranteed sound power level L _{WA} | 78 dB(A) | |
| Sound pressure level L _{PA} | 63 dB(A) | |
| Elastic wheel | Ø 240 mm | |
| Foot-brake | ✓ | |
| Handwheel with adjusting disc | ✓ | |
| Thermal motor protection | ✓ | |
| Restart protection | ✓ | |
| Dimensions (length x width x high) | approx. 1260 x 680 x 1320 mm | |
| Weight | approx. 54 kg | |

Logistic data

| | |
|---|---|
|  | 1260 x 680 x 1320 mm + EP |
|  | approx. 54 kg + EP |
|  | 1200 x 1000 x 1500 mm + EP [PU 2] |
|  | approx. 108 kg + EP |
| | article-no.: 322500 |
| |  |
| | 4 1004265 008401 |
| | article-no.: 322501 |
| |  |
| | 4 1004265 008418 |

Technical modifications reserved.



ALTRAD Equipment Germany GmbH
 Josef-Drexler-Str. 8, 89331 Burgau, Germany
 Phone.: +49 (0) 82 22 / 4130-0 - Fax: +49 (0) 82 22 / 4130-24 - E-mail: info@lescha-atika.de
 Internet: www.lescha-atika.de